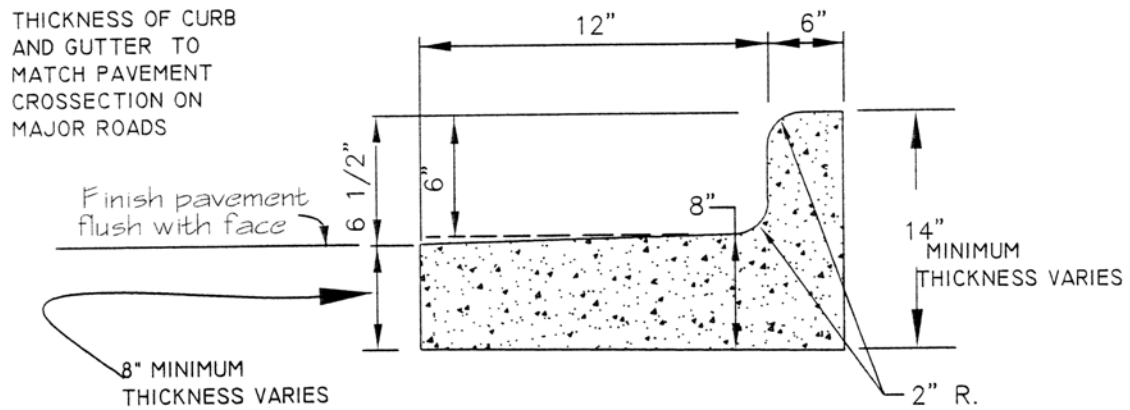

18" CONCRETE ISLAND CURB & GUTTER

NOT TO SCALE

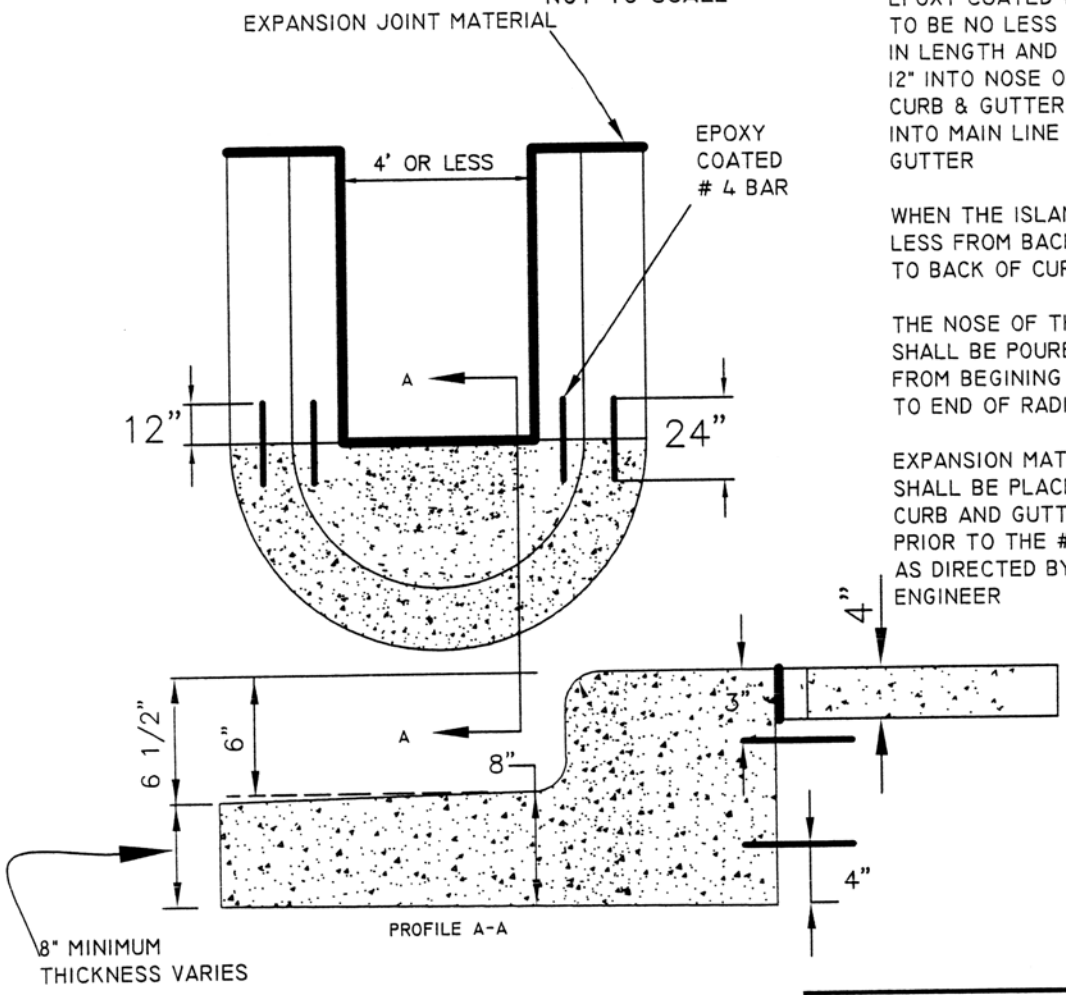

EPOXY COATED # 4 BAR IS TO BE NO LESS THAN 24" IN LENGTH AND EXTEND 12" INTO NOSE OF ISLAND CURB & GUTTER AND 12" INTO MAIN LINE CURB & GUTTER

WHEN THE ISLAND IS 4' OR LESS FROM BACK OF CURB TO BACK OF CURB

THE NOSE OF THE ISLAND SHALL BE POURED SOLID FROM BEGINING OF RADIUS TO END OF RADIUS.

EXPANSION MATERIAL SHALL BE PLACED AT THE CURB AND GUTTER JOINT PRIOR TO THE # 4 BAR OR AS DIRECTED BY THE ENGINEER

CITY OF WYOMING
ENGINEERING DEPARTMENT

18" CONCRETE ISLAND CURB & GUTTER

DRAWN BY- MW	I-25B
CHECKED BY- RH	
DATE DRAWN- 2-9-2005	
DATE REVISED- 2-8-2007	