



\*\* ALL TIMBERS TO MEET 0.6 PCF TREATMENT RETENTION

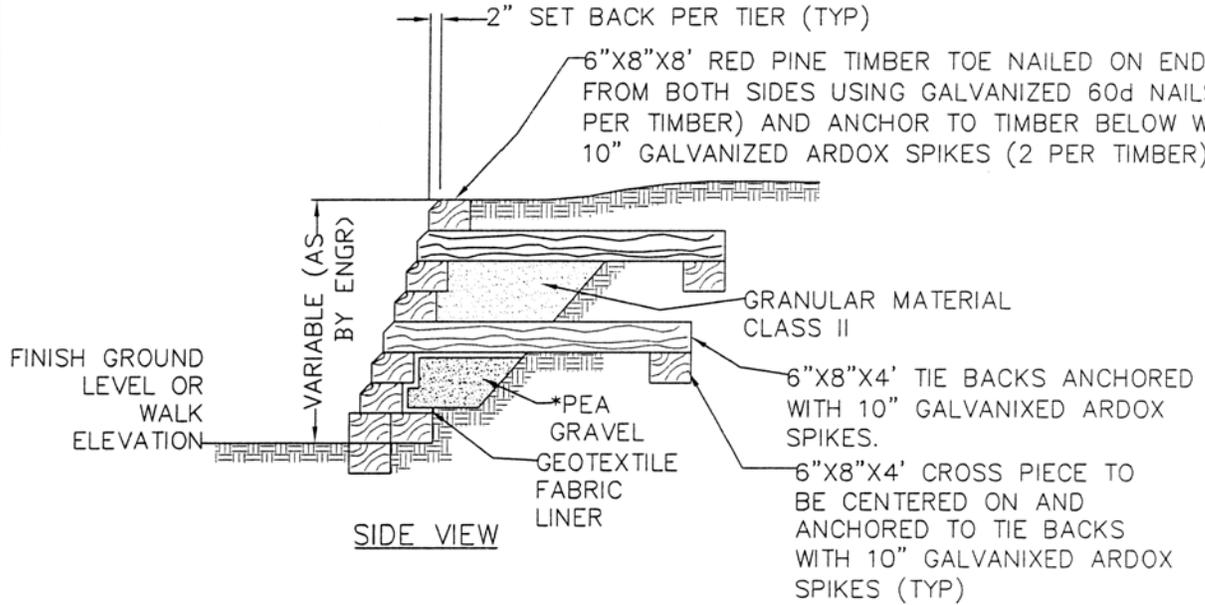

TIMBERS BETWEEN TIE BACKS TO BE CUT TO FIT. (INCLUDED IN ITEM "TREATED TIMBER FOR WALL, 6"X8"X8'")

\*PEA GRAVEL GRADING SIEVE ANALYSIS PERCENT PASSING  
 $\frac{1}{2}$ " = 100  
 $\frac{3}{8}$ " = 95-100  
 NO. 4 = 30-60  
 NO. 8 = 0-10  
 LOSS BY WASHING = 0-.8

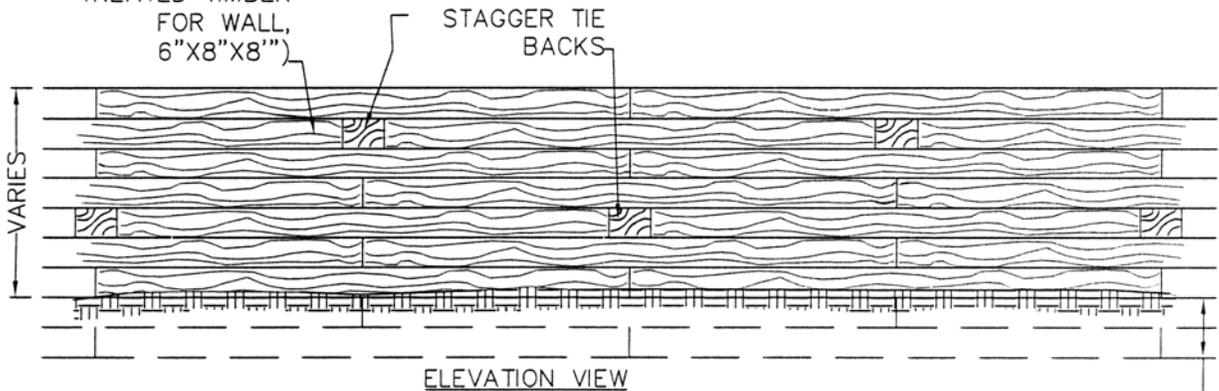

2 TIERS BURIED

**MEASUREMENT AND PAYMENT:**

THE COMPLETED WORK AS MEASURED FOR TREATED TIMBER WALL WILL BE PAID FOR AT THE CONTRACT UNIT PRICE BASED ON 8 LFT. OF TIMBER = T EA. EXCAVATION FOR WALL, GEOTEXTILE FABRIC LINER, PEA GRACEL, CLASS II BACK FILL AND HARDWARE ARE INCLUDED IN ITEM "TREATED TIMBER FOR WALL (6"X8"X8')".

PAY ITEM	PAY UNIT
TREATED TIMBER FOR WALL (6"X8"X8')	EACH

CITY OF WYOMING  
 ENGINEERING DEPARTMENT

**TREATED TIMBER WALL**

DRAWN BY- ML  
 CHECKED BY-RH  
 DATE DRAWN- 8-11-2003  
 DATE REVISED-

1-29C

TREATED TIMBER WALL