


** ALL TIMBERS TO MEET 0.6 PCF TREATMENT RETENTION

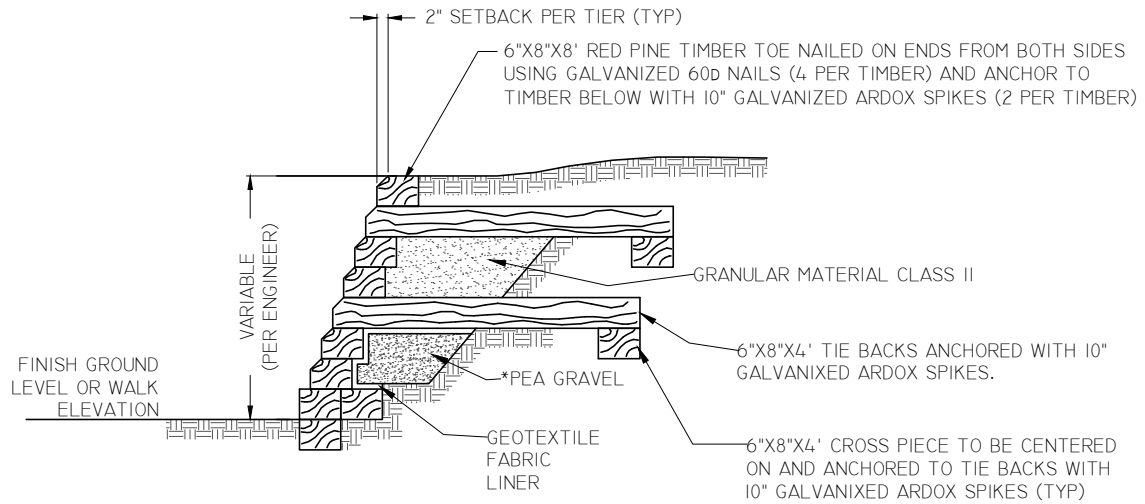

SIDE VIEW

*PEA GRAVEL GRADING SIEVE ANALYSIS
PERCENT PASSING

$\frac{1}{2}$ " = 100


$\frac{3}{8}$ " = 95-100

NO. 4 = 30-60

NO. 8 = 0-10

LOSS BY WASHING = 0-.8

TIMBERS BETWEEN TIE BACKS TO BE CUT TO FIT.
(INCLUDED IN PAY ITEM)

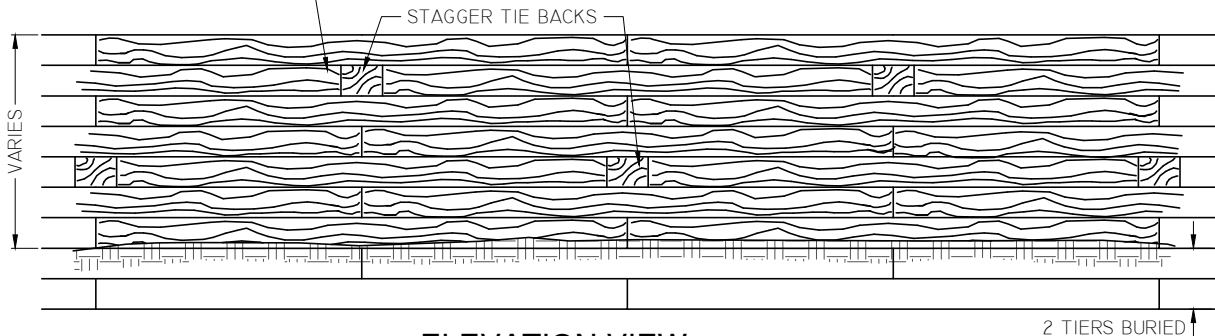

ELEVATION VIEW

MEASUREMENT AND PAYMENT:

THE COMPLETED WORK AS MEASURED FOR TREATED TIMBER WALL WILL BE PAID FOR AT THE CONTRACT UNIT PRICE BASED ON 8 LFT. OF TIMBER = T EA. EXCAVATION FOR WALL, GEOTEXTILE FABRIC LINER, PEA GRAVEL, CLASS II BACK FILL AND HARDWARE ARE INCLUDED IN ITEM.

PAY ITEM	PAY UNIT
TREATED TIMBER FOR WALL (6"x8"x8')	EACH

CITY OF WYOMING
ENGINEERING DEPARTMENT

**TREATED TIMBER
WALL**

DRAWN BY - KJM

CHECKED BY - JJ0

DATE DRAWN - 3-2021

DATE REVISED - 3-2021

I-29C

TREATED TIMBER WALL