


SECTION A-A

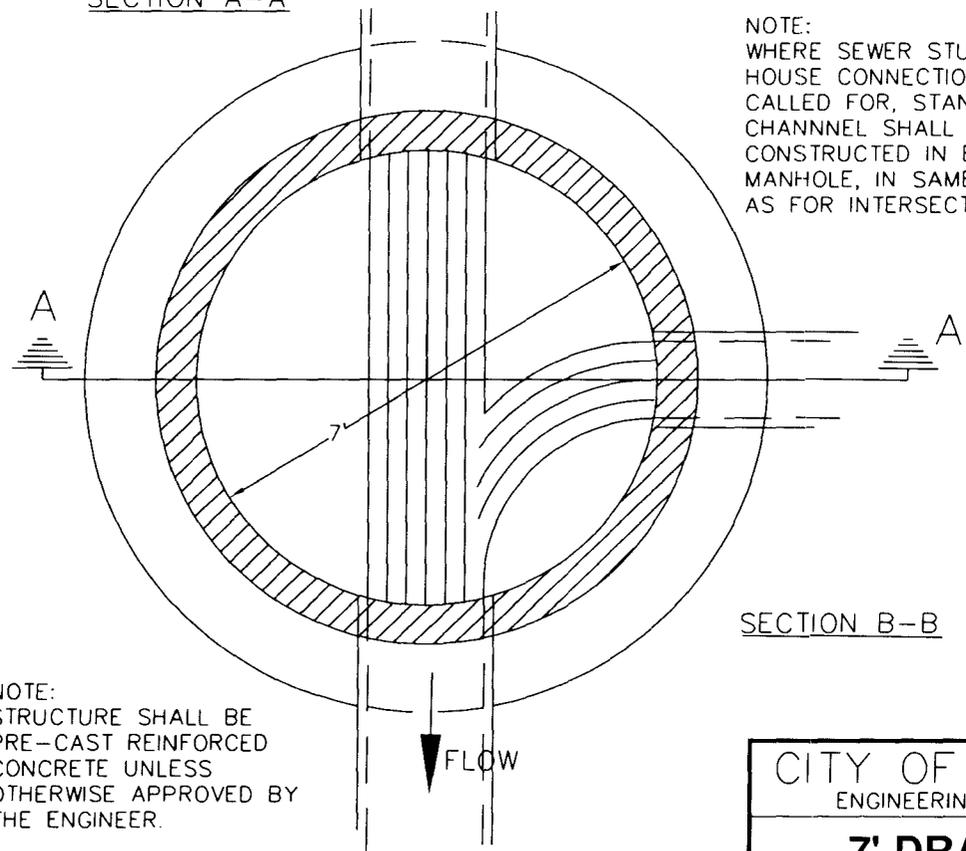

SECTION B-B

USE E.J. #1040C (375 LBS) CASTING AND COVER OR APPROVED EQUAL. HEAVY DUTY

3 LAYERS OF PRECAST AND OR RUBBER ADJUSTMENT RINGS FOR ADJUSTMENT

6" FOR MONOLITHIC CONCRETE AND CONCRETE BLOCK
5" FOR PRE-CAST REINFORCED CONCRETE PIPE

CLASS "B" CONCRETE

CONCRETE CRADLE TO FIRST PIPE JOINT

NOTE:
WHERE SEWER STUBS OR HOUSE CONNECTIONS ARE CALLED FOR, STANDARD CHANNEL SHALL BE CONSTRUCTED IN BOTTOM OF MANHOLE, IN SAME MANNER AS FOR INTERSECTING SEWER.

NOTE:
STRUCTURE SHALL BE PRE-CAST REINFORCED CONCRETE UNLESS OTHERWISE APPROVED BY THE ENGINEER.

NOTE:
BELOW 15' DEPTH MEASURED FOR PRESENT GROUND SURFACE, MANHOLE WALLS SHALL BE 12" THICK AND DIAMETER OF BASE 10'4"

7' DRAINAGE STRUCTURE

CITY OF WYOMING ENGINEERING DEPARTMENT	
7' DRAINAGE STRUCTURE	
DRAWN BY - ML	S-7D
CHECKED BY - RH	
DATE DRAWN - 8-22-2003	
DATE REVISED - 3-9-2009	