

STEEL POLE

4 1/2" O.D. x .237 Wall Schedule 40-10.79 lb/ft
Galvanized Per ASTM-A-123 if required

ALUMINUM POLE

6063-T6 Alloy
4 1/2" O.D. x .237 Wall Schedule 40-3.73 lb/ft
Spun Finish (Unless specified otherwise)



POST CAP
PB5401




POLE LENGTH—VARIABLE
(Mounting Height Less 12")

MOUNTING HEIGHT—VARIABLE

| Catalog No. | Description | Weight |
|--------------|---|-------------|
| *PB5100-2 | 2' Spun Aluminum Pole | 7.50 lbs. |
| *PB5100-7 | 7' Spun Aluminum Pole | 26.00 lbs. |
| *PB5100-9 | 9' Spun Aluminum Pole | 33.50 lbs. |
| *PB5100-10.5 | 10' 6" Spun Aluminum Pole | 39.50 lbs. |
| *PB5200-7 | 7' Steel Pole (Galvanized) | 75.00 lbs. |
| *PB5200-9 | 9' Steel Pole (Galvanized) | 97.00 lbs. |
| *PB5200-10.5 | 10' 6" Steel Pole (Galvanized) | 114.00 lbs. |
| PB5300 | Square Aluminum Base | 23.75 lbs. |
| PB5301 | Octagonal Aluminum Base | 25.50 lbs. |
| PB5306 | Anchor Bolt (Set of 4 with 1 nut and washer per bolt) | 9.25 lbs. |
| PB5307 | Square Cast Iron Base (Painted-specify green or yellow) | 74.00 lbs. |
| PB5308 | Square Cast Iron Base (Galvanized) | 74.00 lbs. |
| PB5309 | Octagonal Cast Iron Base (Painted-specify green or yellow) | 76.00 lbs. |
| PB5310 | Octagonal Cast Iron Base (Galvanized) | 76.00 lbs. |
| PB5311 | Square Aluminum Base (Heat treated 356-T6) | 23.75 lbs. |
| PB5401 | Post Cap (Acorn Type) | 1.50 lbs. |
| PB5402 | Post Cap (Dome Type) | 1.25 lbs. |


*Other lengths available on request.

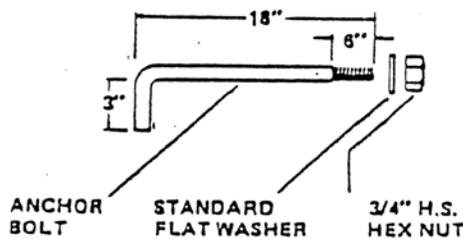

Pelco's Signal Bases and Poles are manufactured to exacting specifications from the highest quality materials. These products provide ease of installation, durability and the very minimum in maintenance.


REQUIRED

PELCO #PB5100-9
9' SPUN ALUMINUM POLE AND
PELCO #PB5300
SQUARE ALUMINUM BASE WITH ANCHOR BOLTS
OR EQUAL

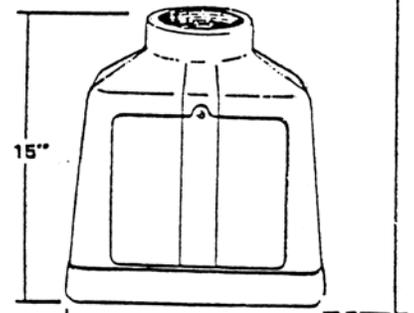

13 5/8"

BOLT CIRCLE
12" Minimum
14" Maximum



CITY OF WYOMING
DEPARTMENT OF ENGINEERING

WALK WAIT PEDESTAL

DRAWN BY: JZ
CHECKED BY: MB
APPROVED BY: WDR
DATE: MARCH 1990