


TO BE IN LINE WITH EXISTING OR PROPOSED LAMP FOUNDATIONS OR AS CALLED FOR ON PLANS.

**NOTE:**

1. INSTALL 2-1/2" CONDUIT BEND(S) IN ALL NEW FOUNDATIONS AS DIRECTED BY THE ENGINEER. (INDICATE DIRECTION OF BENDS IN FOUNDATION TOP).
2. INSTALL POLE SO THAT THE FOUNDATION & ANCHOR BOLTS ARE PERPENDICULAR TO THE SPAN DIRECTION.

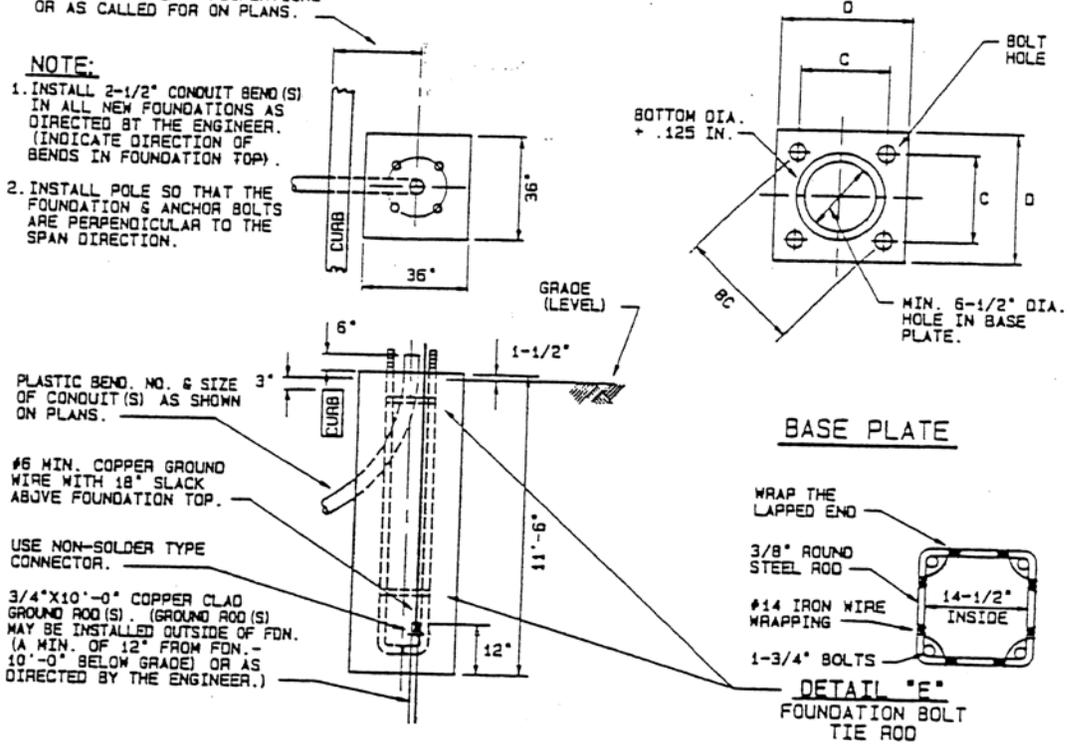

**ANCHOR BASE STEEL STRAIN POLE FOUNDATION**

2" PVC CONDUIT WILL BE DELETED FROM BASE WHEN SIGNAL POLE IS USED TO SUPPORT OVERHEAD TRAFFIC SIGNS

NOTE: For Dimensions and Additional Notes see Sheet T-1

CITY OF WYOMING DEPARTMENT OF ENGINEERING	
CONCRETE BASE FOR TRAFFIC SIGNAL/SIGN SUPPORT POLE	
DRAWN BY.	JZ.
CHECKED BY.	<i>MB</i>
APPROVED BY.	<i>WDS</i>
DATE	MARCH 1990