



**NOTE:**

ALTERNATE FOUNDATION MAY BE  
CONSTRUCTED 24" ROUND-48"  
DEEP.

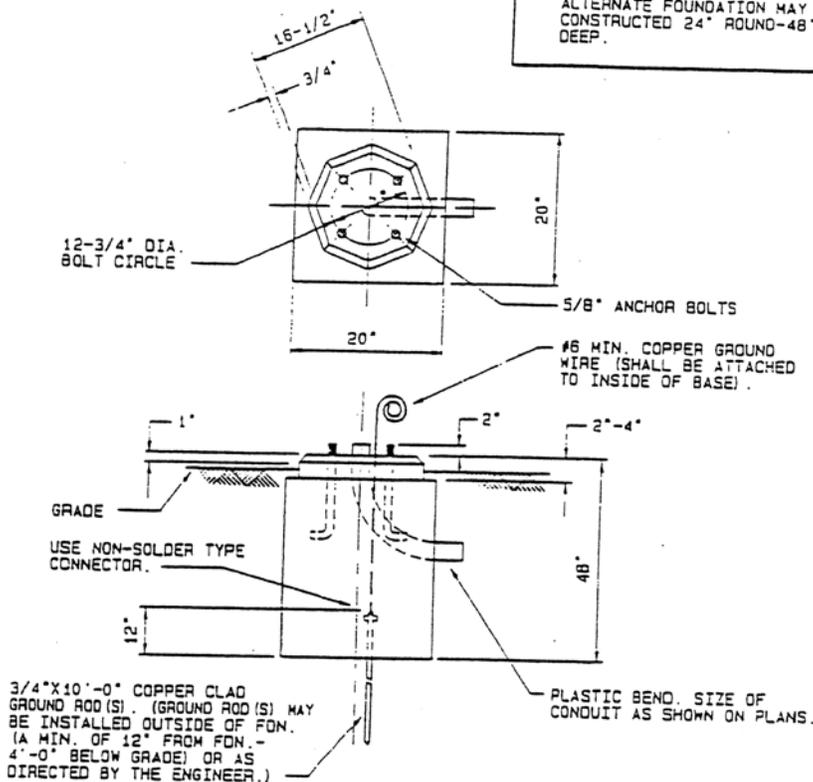

PEDESTAL FOUNDATION

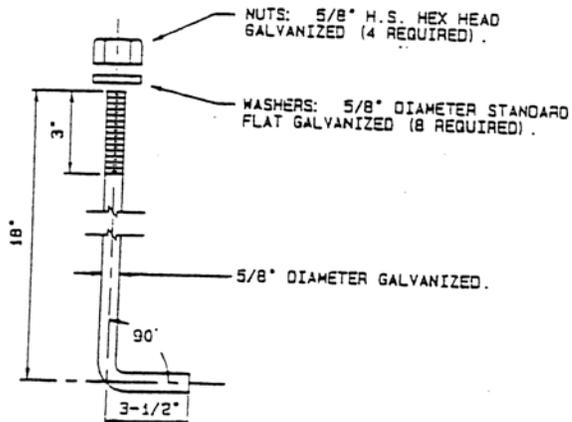

DETAIL OF ANCHOR BOLT

ANCHOR BOLTS ARE TO BE 307 STEEL  
(4 REQUIRED)

TYPE OF ANCHOR BOLTS AND PLACEMENT  
IN CONCRETE BASE WILL BE PER  
DETAIL T2

POURED CONCRETE TO MEET CITY OF WYOMING  
AND MDOT STANDARD SPECIFICATIONS

CITY OF WYOMING DEPARTMENT OF ENGINEERING	
CONCRETE BASE FOR WALK WAIT SIGNAL	
DRAWN BY.	JZ.
CHECKED BY.	<i>MB</i>
APPROVED BY.	<i>WSD</i>
DATE	MARCH 1990